


Operator Abdo Lahoud
Telephone
Fax
e-Mail abdo@green-result.com

Cree Inc OSQ A xx 4ME A 40K Cree OSQ Series Area Luminaire, Type IV Medium, A Input Power Designator, 4000K / Luminaire Data Sheet

See our luminaire catalog for an image of the luminaire.

Luminous emittance 1:

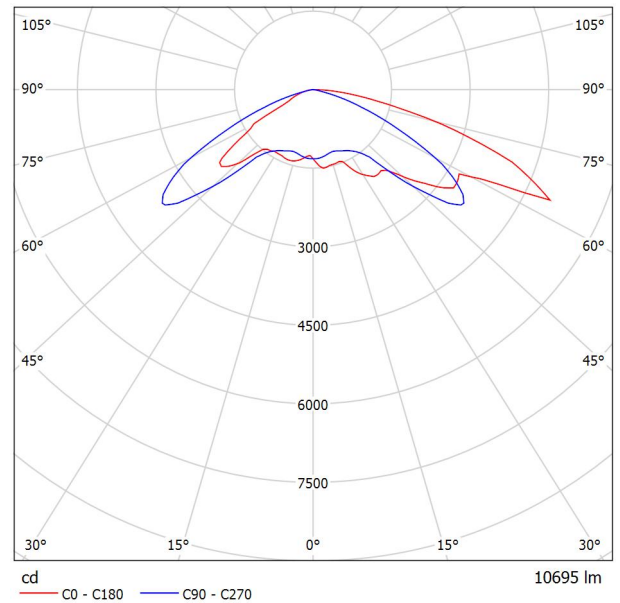


Luminaire classification according to CIE: 100
CIE flux code: 23 63 94 100 100

Due to missing symmetry properties, no UGR table can be displayed for this luminaire.

Operator Abdo Lahoud
 Telephone
 Fax
 e-Mail abdo@green-result.com

Exterior Scene 1 / Planning data

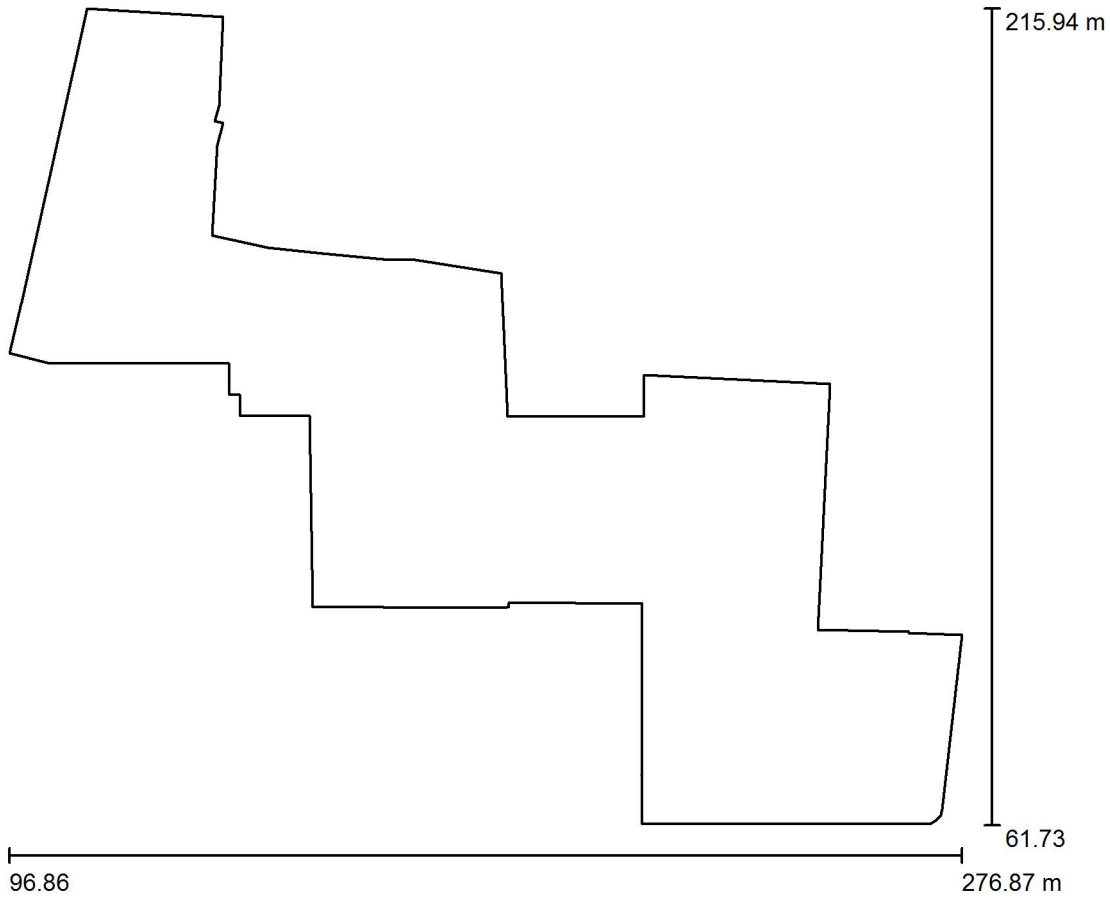

Light loss factor: 0.80, ULR (Upward Light Ratio): 0.0%

Scale 1:1430

Luminaire Parts List


No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	63	Cree Inc OSQ A xx 4ME A 40K Cree OSQ Series Area Luminaire, Type IV Medium, A Input Power Designator, 4000K (1.000)	10695	10695	113.1
Total:			673795	Total: 673795	7122.2

Operator Abdo Lahoud
Telephone
Fax
e-Mail abdo@green-result.com

Exterior Scene 1 / Luminaire parts list


63 Pieces Cree Inc OSQ A xx 4ME A 40K Cree OSQ Series Area Luminaire, Type IV Medium, A Input Power Designator, 4000K See our luminaire catalog for an image of the luminaire.

Article No.: OSQ A xx 4ME A 40K
Luminous flux (Luminaire): 10695 lm
Luminous flux (Lamps): 10695 lm
Luminaire Wattage: 113.1 W
Luminaire classification according to CIE: 100
CIE flux code: 23 63 94 100 100
Fitting: 1 x Eight type MDA 4000K LEDs
(Correction Factor 1.000).




Operator Abdo Lahoud
Telephone
Fax
e-Mail abdo@green-result.com

Exterior Scene 1 / 3D Rendering

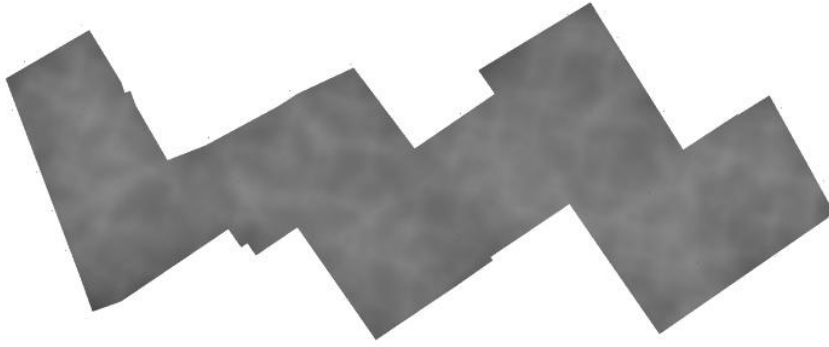

Operator Abdo Lahoud
Telephone
Fax
e-Mail abdo@green-result.com

Exterior Scene 1 / False Color Rendering

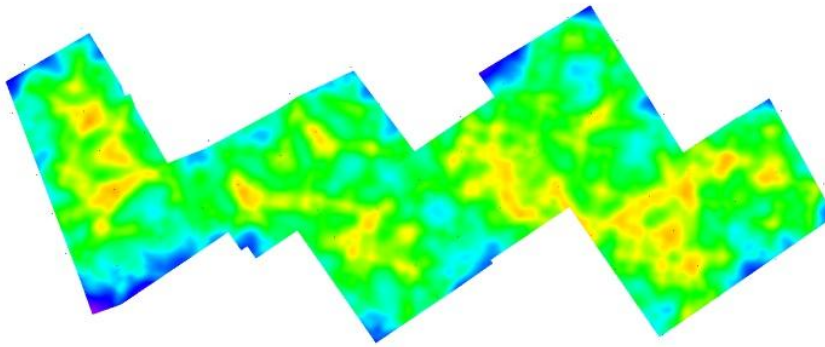

0 10 20 30 40 50 60 70 80 lx